

# Atmospheric Pirani Gauge Combo [SW1&ISG1 Package]

This is a wide range pirani gauge which measures from atmospheric pressure to  $5 \times 10^{-2}$  Pa ( $3.75 \times 10^{-4}$  Torr,  $5 \times 10^{-4}$  mbar) Platinum wire is used for filaments, therefore, the filament will function even at atmospheric pressure.



ISG1



SW1-1/SWP-16



SW1-1/SWP-R1/8

## Features

- ▶ **Wide-range Measurement**  
Measures from atmospheric pressure to  $5 \times 10^{-2}$  Pa ( $3.75 \times 10^{-4}$  Torr,  $5 \times 10^{-4}$  mbar)
- ▶ **Power Supply Voltage**  
Powered with 24VDC or 100VAC to 240VAC input
- ▶ **Shock Resistant**  
Design is highly resistant to shock
- ▶ **Filament Material: platinum (Pt)**  
Corrosion-resistant platinum is used as the filament material
- ▶ **High Visibility LEDs Used for Error Display**
- ▶ **One-touch Adjustment**  
Atmospheric adjustment and the zero point adjustment can be done with one-touch
- ▶ **Maintainability**  
Sensor head can be replaced easily
- ▶ **Measured Value Output Signal**  
Pressure is 0 to 10V Log output
- ▶ **Control Output Signal**  
3 set point output

- ▶ **Serial Communication Spec**  
RS485 communication (ISG1)
- ▶ **Display Unit**  
With visible LED
- ▶ **Certification**  
Conforms with CE


## Applications

- ▶ Process control in low vacuum range of vacuum equipment such as that used for semiconductor, optics and Photovoltaic field, FPD, electronic parts manufacturing
- ▶ Process control in the low vacuum range for industrial equipment such as vacuum furnaces, etc.
- ▶ Process control in low pressure range for vacuum systems with multiple process chambers such as in-line sputtering and single wafer processing equipment
- ▶ For pumping unit (system) which it has a vibration and/or shach in the manufacture process

# Atmospheric Pirani Gauge Combo [SW1&ISG1 Package]

Specifications		
Model	SW1&ISG1 package (DIN type)	SW1&ISG1 package (JIS type)
Specifications	DIN standard	JIS standard
Measurable pressure range	5.0×10 <sup>-2</sup> to 1.0×10 <sup>+5</sup> Pa (3.75×10 <sup>-4</sup> to 760 Torr, 5.0×10 <sup>-4</sup> to 1013 mbar)	
Unit of pressure	Pa	
Connectable sensor	1 pcs	
Pressure indication	Significant: 2 digit, Exponent: 1 digit digital □.□×10□ (LED)	
Update time	200ms	
Sampling time 70ms	70ms running average in 5 times	
Accuracy*	1×10 <sup>-1</sup> to 1×10 <sup>+4</sup> Pa : 7.5×10 <sup>-4</sup> to 75 Torr : ±12% ±1 digit 1×10 <sup>-3</sup> to 100 mbar : 5.0×10 <sup>-2</sup> to 1.0×10 <sup>+1</sup> Pa, 1×10 <sup>+4</sup> to 1×10 <sup>+5</sup> Pa : 3.75×10 <sup>-4</sup> to 7.5×10 <sup>-4</sup> Torr, 75 to 760 Torr : ±22% ±1 digit 5×10 <sup>-4</sup> to 1×10 <sup>-3</sup> mbar, 100 to 1013 mbar :	
Repeatability	1×10 <sup>-1</sup> to 1×10 <sup>+4</sup> Pa : 7.5×10 <sup>-4</sup> to 75 Torr : ±2% ±1 digit 1×10 <sup>-3</sup> to 100 mbar :	
Analog output	DC 0V-10V, LOG output	
Control input signal	Open collector input, negative logic Filament lighting signal, Atmosphere pressure adjustment etc.	
Control output signal	Open collector output, Negative logic [rating: 30Vmax, 50mAmax, 70mW] Error signal Set point 1, 2, 3	
Serial Communication Spec	RS485	
Power supply voltage	DC24V, AC100-240V (AC power adapter in use)	
Operating temperature range	10 to 40°C (50 to 104°F)	
Operating humidity range	15 to 80% (not condensing)	
Weight	Display unit: 250g Sensor unit: 150g (with SWP-16)	
Dimension (Power supply) W×D×H	Display unit: 48mm×96mm×70 mm	50mm×100mm×70 mm
Standard parts	Sensor unit SW1-1: 1pc Display unit ISG1: 1pc Sensor head SWP-16 (NW16) or SWP-R1/8(R1/8): 1pc Sensor head cable: Choose it from 2, 5, 10, 15, 20, 25 or 30m: 1pc AC power adapter: PW-060A-01Y240 (G) Power supply connect to PHOENIX: MSTB 2, 5/3-STF-5, 08: 1pc DIN panel fixation joints: 2pc Instruction manual CD: 1pc	
Option	Inspection result data sheet, General calibration test report, JCSS calibration certificate Input / output connector D-sub 15 socket (M2.6mm screw)	
Applicable standard	CE	

\* The value is accurate after atmospheric pressure adjustment and zero point adjustment.

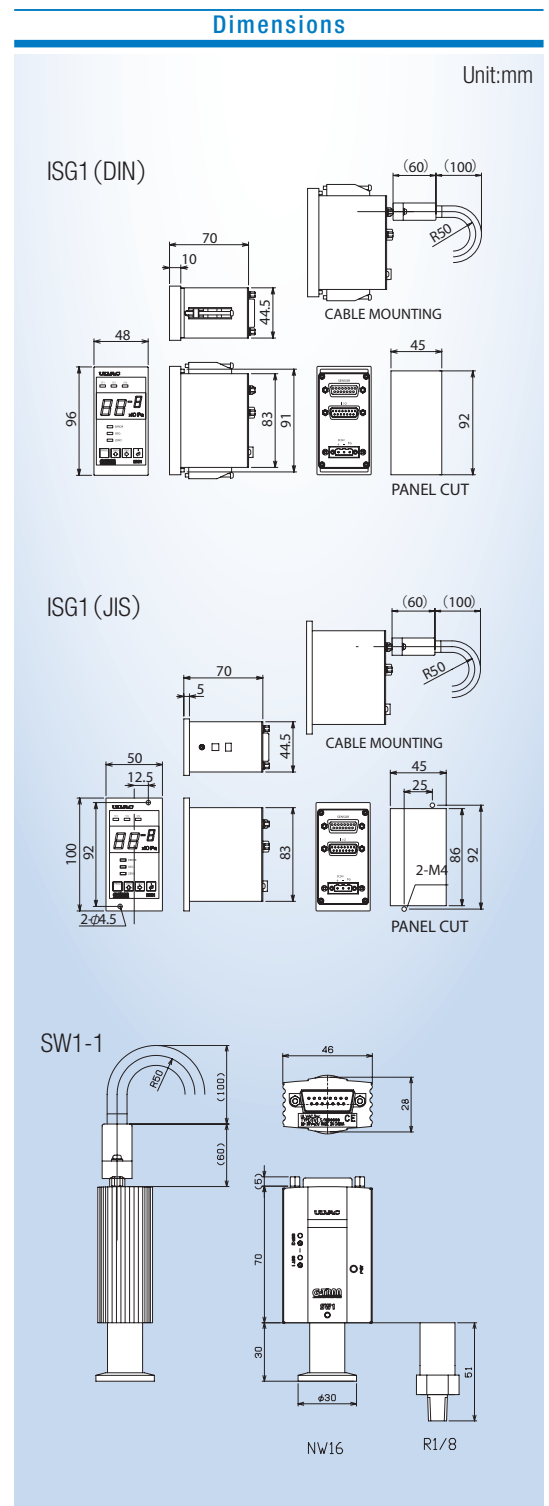

ULVAC, Inc. Components Division

[www.ulvac.co.jp/en](http://www.ulvac.co.jp/en)

Overseas Sales in Japan TEL +81-467-89-2261

USA : ULVAC Technologies, Inc. TEL +1-978-686-7550  
 GERMANY : ULVAC GmbH TEL +49-89-960909-0  
 CHINA : ULVAC (SHANGHAI) Trading Co.,Ltd. TEL (86)21-6127-6610  
 TAIWAN : ULVAC TAIWAN, Inc. TEL +886-3-579-5688  
 KOREA : ULVAC KOREA, Ltd. TEL +82-31-683-2922  
 SINGAPORE : ULVAC SINGAPORE PTE LTD TEL +65-6542-2700

PHILIPPINES : ULVAC SINGAPORE PTE LTD Philippines Branch TEL +63-46-437-7700  
 VIETNAM : ULVAC SINGAPORE PTE LTD Vietnam Representative Office TEL +84-8-6299-8262  
 INDONESIA : ULVAC SINGAPORE PTE LTD Indonesia Representative Office TEL +62-21-8990-5070  
 THAILAND : ULVAC (THAILAND) LTD TEL +66-2-7388883  
 MALAYSIA : ULVAC MALAYSIA SDN. BHD. TEL +60-3-5121-4700  
 INDIA : ULVAC, Inc., India Branch TEL +91-40-27007006

▶ This catalog is subject to change without notice.  
 ▶ This catalog is published in order to sell this product in overseas. Please see Japanese catalog when purchasing in Japan.