

VSO series

Low vacuum area repeatedly evaporated !

- Pumping speed: (20), 40, 60, 100, 200, 300 m³/h
- Ultimate pressure: (200), 40 Pa
- Built-in oil mist filter
- Air cooling






Specifications

Model		VSO20	VSO40	VSO60	VSO100	VSO200	VSO300
Performance	Ultimate pressure (Pa)	200	40				
	Maximum pumping speed (m ³ /h)	20	40	60	100	200	300
Motor	Power supply	1 Pha 220V 50Hz	3 Pha 380V 50Hz	3 Phase 380V 50Hz			
	Power consumption (kW)	0.75	1.1	2.2	3.0	5.5	7.5
	Rotating speed (rpm)	3000	1450				
	Remark	Ordinary motor	IP55	※Various voltages and explosion-safe motors are also available (manufactured to order)			
Dimensions	Width (mm)	250	290	420	420	515	565
	Length (mm)	320	635	625	680	925	1015
	Height (mm)	220	265	290	295	420	425
	Weight (kg)	19	42	55	75	149	193
	Inlet/ Outlet port	G 3/4	G 1-1/4			G 2	
Lubrication	Oil capacity (L)	0.5	1.5	2.0	2.0	6.0	8.0
	Oil	OKO68					

Single-stage Oil Rotary Vacuum Pump

Pumping rate curve

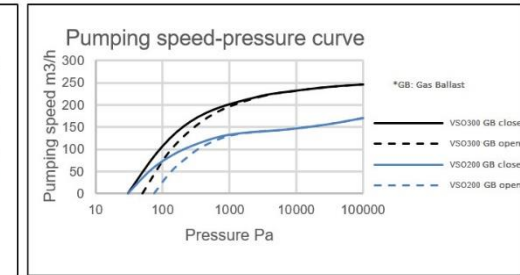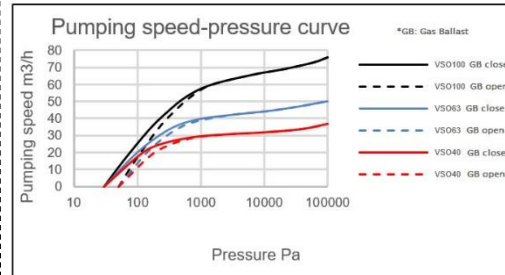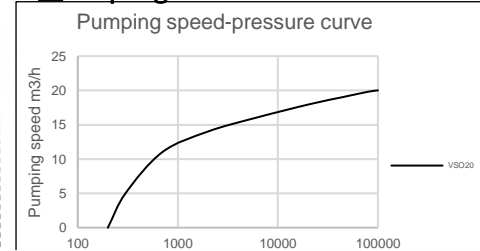

Dimensions (mm)

